

DESCRIPTION

The B3NG1641 is a noise generator, used for X-band marine radar receiver calibration. It comprises a noise diode coupled into a short waveguide section.

Frequency range	9330 to 9500	MHz
Calibration frequency	9375	MHz
Excess Noise Ratio	15	dB


GENERAL DATA

Operating voltage	18	V d.c.
Operating current	0 to 25	mA
Overall dimensions	93 x 15 x 42 mm	max
Net weight	100 g	approx
Waveguide size	WR90 (WG16)	

MAXIMUM AND MINIMUM RATINGS

	Min	Max	
Operating voltage (see note 1) . . .	+13	+21	V
Maximum current	0	30	mA
Peak R.F. input (1uS,1kHz) . . .		60	kW
Body temperature:			
Operating	-15	+70	°C
Storage	-40	+ 85	°C
Vibration (50Hz)		10	g
Shock (0.5ms, 3 axis)		100	g

BLOCK DIAGRAM

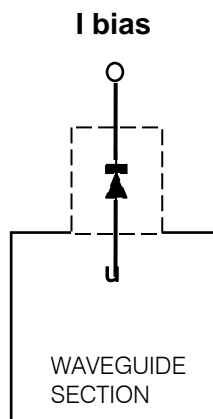

TYPICAL OPERATION

Operating Conditions

Calibration frequency	9375	MHz
Frequency	9375 ± 85	MHz

Typical Performance (at 25 °C)


	Min	Typ	Max	
Operating current	-	15	25	mA
ENR versus current (see note 2).				
ENR	14.5	15.0	15.5	dB
(Current 17 to 23mA)				
Tolerance at calibration points	± 0.25			dB
Linearity between calibration points . .	± 0.35			dB
temperature coefficient of ENR	-0.015			dB/°C
Insertion Loss		0.2		dB
VSWR.		1.25:1		
(Operating & non operating) .				
Noise turn on time (5% to 95%)		3.5		µS
Noise turn off time (95% to 5%)		5.0		µS

NOTES

1. Positive only; negative voltage must not be applied.
2. Current values for ENR at 15, 12, and 4 dB are indicated on device label.

Whilst e2v technologies has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. e2v technologies accepts no liability beyond the set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of tubes or other devices in accordance with information contained herein.

OUTLINE

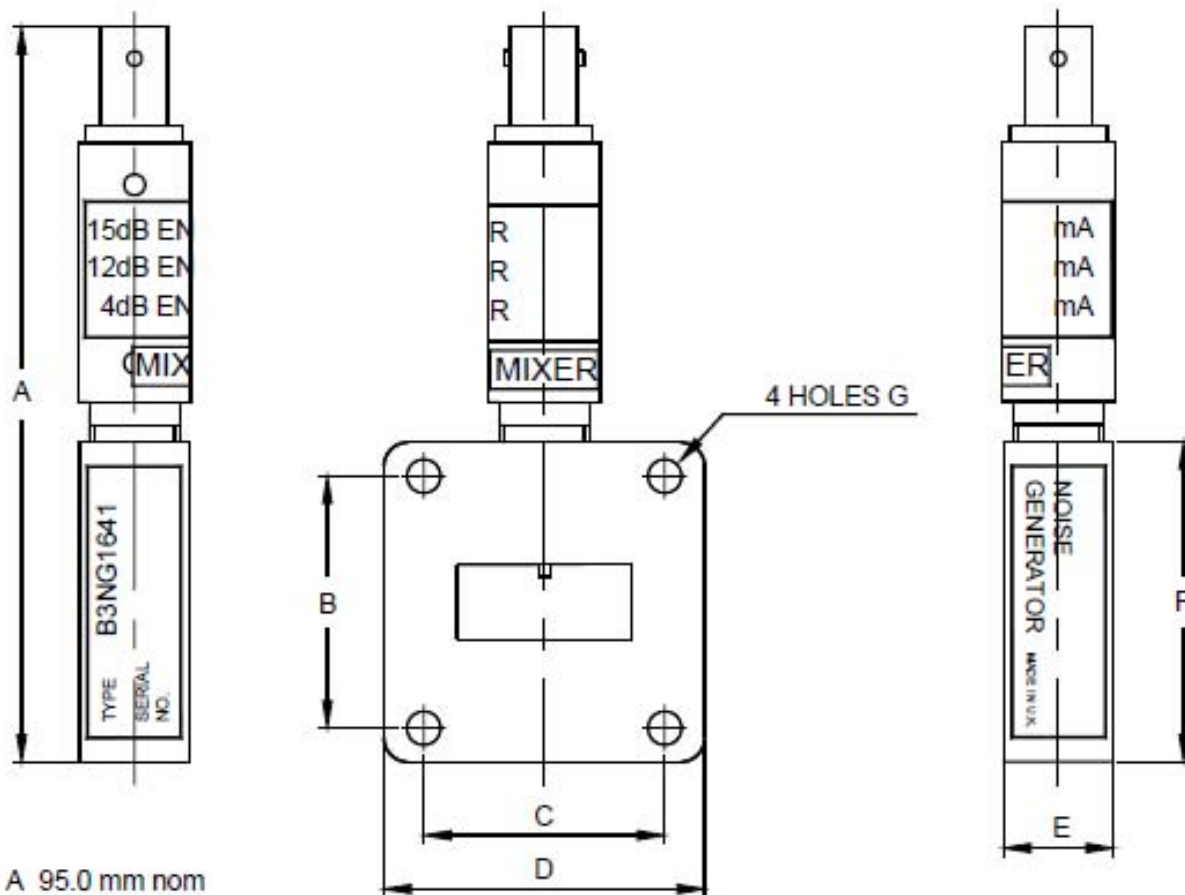

- A 95.0 mm nom
- B 32.5 mm \pm 0.1
- C 31.0 mm \pm 0.1
- D 41.5 mm nom
- E 15.0 mm max
- F 41.5 mm nom
- G \varnothing 4.2/4.4 mm

Whilst e2v technologies has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. e2v technologies accepts no liability beyond the set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of tubes or other devices in accordance with information contained herein.

e2v technologies (uk) limited, Waterhouse Lane, Chelmsford, Essex CM1 2QU United Kingdom Telephone: +44 (0)1245 493493 Facsimile: +44 (0)1245 492492
 e-mail: enquiries@e2v.com Internet: www.e2v.com Holding Company: e2v technologies plc